

PV GUARD™ Series XUNZEL


PV GUARD™
TOTAL PROTECTION

Manual

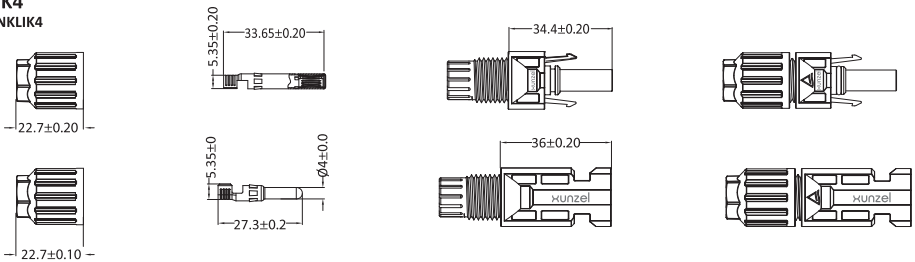


Specifications				
Product	XUNKLIK4	XUNKLIK4Y	XUNKLIK4Y3	XUNKLIK5
Rated Voltage	TUV 1000V DC			
Rating Current	35A	35A	35A	65A
Suitable Cable Cross Sections	2.5-6mm ²	-	-	6-16mm ²
Pin Dimension	Ø 4.0mm			
Test Voltage	6000V AC (1min)			
Pollution Degree	2			
Protection Class	Class II			
Contact Material	Copper, Tin Plated			
Contact Resistance	≤ 5mΩ			
Connector Material	PPO			
Degree of Protection IP	IP68 (IEC 60529)			
Withdrawal Force	≥ 50N			
Insertion Force	≥ 50N			
Temperature Range	-40°C -- +85°C			
Flame Class	UL94V-0			

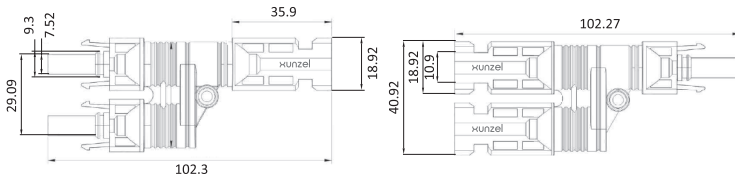
Diagrams - Unit: mm

XUNKLIK4

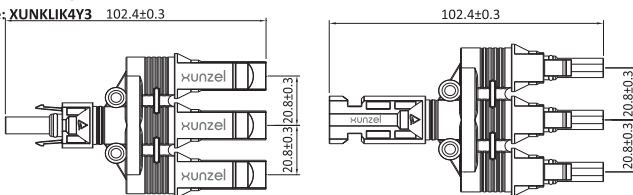
Code: XUNKLIK4


XUNKLIK4Y


Code: XUNKLIK4Y


XUNKLIK4Y3

Code: XUNKLIK4Y3 102.4±0.3

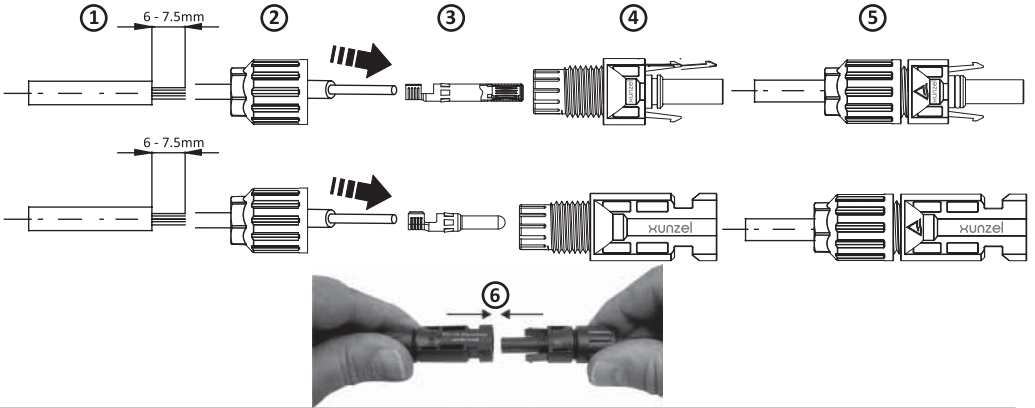

XUNKLIK5

Code: XUNKLIK5



Installation
XUNKLIK4

Code: XUNKLIK4


XUNKLIK5

Code: XUNKLIK5

